



# NARSIMHA REDDY ENGINEERING COLLEGE

**UGC AUTONOMOUS** ACCREDITED BY NBA & NAAC WITH A-GRADE




## Engineering chemistry

### Unit-2 Electrochemistry and corrosion

## 2 .Electrochemistry and corrosion


- 🔌 Electrochemistry is the branch of chemistry which deals with the conversion of electrical energy into chemical energy and vice-versa
- 🔌 **ELECTROLYTIC CELLS**: The cell which converts electrical energy to chemical energy Eg : primary cell.
- **ELECTROCHEMICAL CELL**: The cell which converts chemical energy to electrical energy. Eg : galvanic cell.
- **ANODE**: Anode is the electrode at which oxidation occurs. Cathode: Cathode is the electrode at which reduction occurs.
- **ELECTROLYTE**: Electrolyte is a substance which in aqueous solution or molten state liberates ions and allows electric current to pass through, thereby resulting in its decomposition. ex: acids, bases etc.,
- HALF CELL**: Half cell is a part of cell, containing electrode dipped in a electrolytic solution. If oxidation occurs at the electrode that is called oxidation half cell. If reduction occurs at the electrode that is called reduction half cell.
- CELL**: Cell is a device consisting two half cells. The two half cells are connected through a wire and salt bridge

## Salt bridge:

-  Salt bridge: It is an inverted U-shaped glass tube filled with electrolyte mixed with agar-agar or gelatin to impart gel-like characteristics.
-  The mouth of the tube is blocked with cotton plugs. All these precautions are taken to ensure that the contents of the salt bridge should not undergo mechanical mixing with the contents of the electrode.
-  Common electrolytes used are KCl,  $\text{NH}_4\text{Cl}$  etc. Glass tube Electrolyte + agar-agar powder Cotton plug

# Electrode potential (E):

- 🔋 Electrode potential (E): It is the measure of tendency of an electrode to lose or gain electrons, when it is in contact with a solution of its own salt.

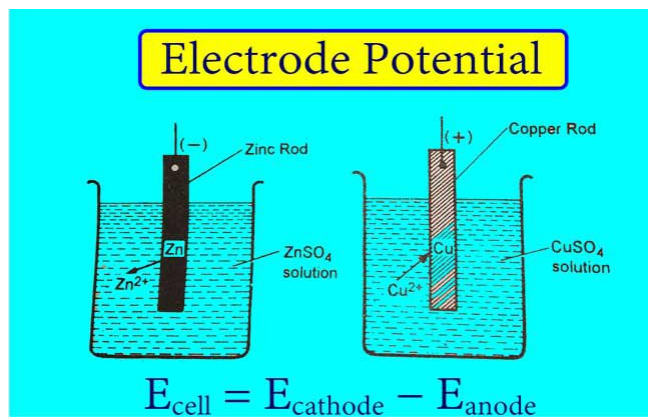

- 🔋  $\text{Zn} \rightarrow \text{Zn}^{2+} + 2\text{e}^-$  (oxidation)                       $\text{Cu}^{2+} + 2\text{e}^- \rightarrow \text{Cu}$  (reduction)

- 🔋 Factors affecting electrode potential:

- 🔋 1. The nature of the metal 2. The temperature 3. The concentration of ions in solution

- 🔋 **Standard electrode potential** ( $E^\circ$ ): It is the measure of tendency of an electrode to lose or gain electrons, when It is in contact with a solution of its own salt of 1 molar concentration at 25 oC

- 🔋 Electrochemical cell or Galvanic cell An electrochemical cell is a device in which a redox reaction is utilized to get electrical energy (chemical energy is converted to electrical energy). ex: Daniel cell

# Galvanic cell:

- 🔋 Electrochemical cell or Galvanic cell An electrochemical cell is a device in which a redox reaction is utilized to get electrical energy (chemical energy is converted to electrical energy). ex: Daniel cell
- 🔋 **Daniel cell:** It consists of a Zinc electrode dipped in  $\text{ZnSO}_4$  solution and a copper electrode dipped in a  $\text{CuSO}_4$  solution.
- 🔋 Each electrode is known as a half cell. The two solutions are interconnected by a salt bridge and the two electrodes are connected by a wire through the voltmeter.
- 🔋 Oxidation takes place in the zinc electrode by the liberation of electrons, so this electrode is called negative electrode or anode.
- 🔋 Reduction takes place in the copper electrode by the acceptance of electrons, so this electrode is called positive electrode or cathode.
- 🔋 Daniel cell can be represented as  $\text{Zn} \mid \text{ZnSO}_4 \parallel \text{CuSO}_4 \mid \text{Cu}$
- 🔋 The double bar  $\parallel$  represents salt bridge.
- 🔋 At anode:  $\text{Zn} \rightarrow \text{Zn}^{2+} + 2\text{e}^-$
- 🔋 At cathode:  $\text{Cu}^{2+} + 2\text{e}^- \rightarrow \text{Cu}$
- 🔋 Cell reaction:  $\text{Zn} + \text{Cu}^{2+} \rightarrow \text{Zn}^{2+} + \text{Cu}$

# Galvanic cell




# Nernst equation:

- Nernst equation Nernst equation is used to calculate electrode potential of unknown metal.
- Consider a redox reaction  $M^{n+} + ne^- \rightleftharpoons M$
- $E = E_o + \frac{2.303 RT}{n} \log [M^{n+}]$
- when  $R = 8.314 \text{ J/K/mole}$ ;  $F = 96500 \text{ coulombs}$ ,  $T = 25^\circ \text{C}$ , the equation becomes
- $E = E_o \text{ red} + \frac{0.0592}{n} \log [M^{n+}]$
- Similarly for oxidation potential
- $E = E_o \text{ oxid} - \frac{0.0592}{n} \log [M^{n+}]$

# Standard hydrogen Electrode

- 🔋 To determine the single electrode potential it is combined with SHE is combined with potentiometer and the EMF is measured.
- 🔋 A standard Hydrogen electrode consists of a Pt coil which is coated with platinum black, enclosed in a glass tube through which  $H_2$  gas passed at a pressure of 1 atm and it is placed in 1M  $HCl$  Solution.
- 🔋 The following equilibrium exists at the electrode.
- 🔋  $2H^+(aq) + 2e^- \rightleftharpoons H_2(g)$  When S.H.E. is paired with another electrode in a galvanic cell it can undergo either oxidation or reduction depending on the magnitude of potential of coupled electrode.
- 🔋 The electrode reaction of this electrode is written as:  $\frac{1}{2} H_2 \rightarrow H^+ + e^-$
- 🔋 Applying Nernst equation
- 🔋 
$$E_{H_2/H^+} = E^0_{H_2/H^+} - 0.0592/2 \log a_{H^+} / p_{H_2}^{1/2}$$
- 🔋 At 1 atm pressure
- 🔋  $E_{H_2/H^+} = E^0_{H_2/H^+} - 0.0592 \log a_{H^+}$
- 🔋  $E_{H_2/H^+} = E^0_{H_2/H^+} + 0.0592 \text{ pH}$

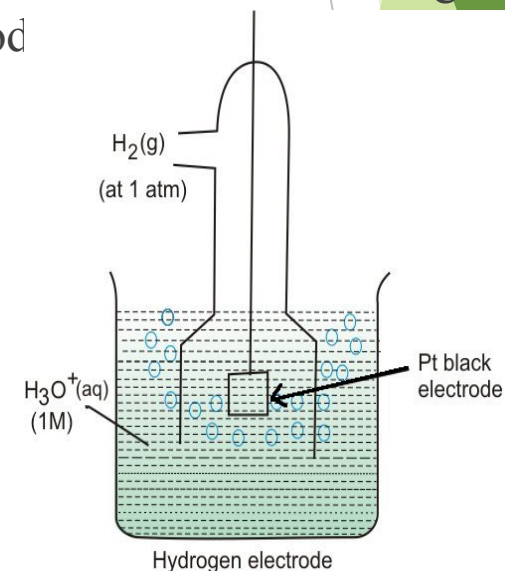



# Calomel electrode:

- Calomel electrode consists of a glass tube containing mercury at the bottom over which mercurous chloride (calomel) is placed.
- The remaining portion of the tube is filled with a saturated solution of KCl. The side tube is used for making electrical contact with salt bridge.

One end of the pt wire is dipped in mercury and another is end is connected to potentiometer.



The potential of the Calomel electrode depends on the concentration of the KCl solution.


The electrode potentials for the various KCl concentrations at 25 oC are

KCl concentration      Electrode potential (in volts)

0.1 N      0.33 0.28 0.2

1.0 N      0.28



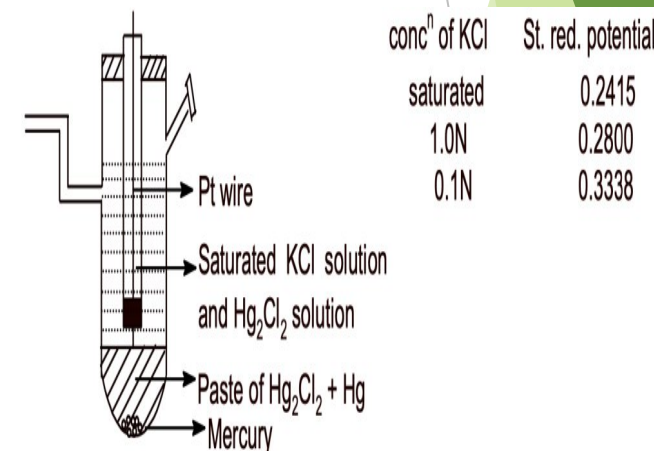




Saturated      0.24



# CORROSION

- 🔋 The process of decay metal by environmental attack is known as corrosion.
- 🔋 Metals undergo corrosion and convert to their oxides, hydroxides, carbonates, sulphides etc.
- 🔋 E.g. Iron undergoes corrosion to form reddish brown colour rust  $[\text{Fe}_2\text{O}_3 \cdot 3\text{H}_2\text{O}]$ .
- 🔋 Copper undergoes corrosion to form a green film of basic carbonate  $[\text{CuCO}_3 + \text{Cu}(\text{OH})_2]$
- 🔋 Corrosion (Oxidation)
- 🔋 Pure Metal  $\rightleftharpoons$  Metallic compound + energy
- 🔋 (Un stable) Reduction(extraction) (Stable)(Ores/Minerals)
- 🔋 **Causes of corrosion:**
- 🔋 The metals exist in nature in the form of their minerals or ores, in the stable combined forms as
- 🔋 oxides, chlorides, silicates, carbonates, sulphides etc.
- 🔋 During the extraction of metals, these ores are reduced to metallic state by supplying
- 🔋 considerable amounts of energy.
- 🔋 Hence the isolated pure metals are regarded as excited states than their corresponding
- 🔋 ores. So metals have natural tendency to go back to their combined state (minerals/ores).
- 🔋 When metal is exposed to atmospheric gases, moisture, liquids etc., and the metal surface reacts
- 🔋 and forms more thermodynamically stabled compounds.

# Effects of corrosion:


-  Wastage of metal in the form of its compounds.
-  The valuable metallic properties like conductivity, malleability, ductility etc. are lost due to
-  corrosion.
-  Life span and efficiency of metallic parts of machinery and fabrications is reduced.
-  Poor appearance
-  Maintenance and operating costs
-  Plant shutdowns

# THEORIES OF CORROSION

 There are two theories of corrosion

 1. Dry/Chemical theory

 2. Wet/Electrochemical/galvanic Corrosion

 **1. DRY (OR) CHEMICAL CORROSION:** According to this theory this type of corrosion occurs due to the direct chemical attack of atmospheric gasses ( $O_2$ ,  $H_2S$ ,  $SO_2$ , and  $N_2$ ) on the metal surface in the absence of moisture.

 There are three main types of dry Corrosion:

 i. Oxidation corrosion

 i. Corrosion of the other gases

 ii. Liquid metal corrosion.

# Oxidation Corrosion:

- 🔋 This is carried out by the direct action of oxygen in low or high temperatures on metals in absence of moisture.
- 🔋 Alkali metals and Alkaline earth metals are rapidly oxidized at low temperatures.
- 🔋 At high temperature all metals are oxidized (except Ag, Au, and Pt).
- 🔋 Oxidation occurs first at the surface of the metal and results in the formation of metal ions ( $M^{2+}$ ) at metal



- 🔋 Oxygen changes to ionic form ( $O^{2-}$ ) due to the transfer of electrons from metal at oxide film.



- 🔋 Oxide ions react with the metal ion to form the metal-oxide film.

- 🔋  $M + O_2 \rightarrow M^{2+} + 2O^{2-} = (MO) \text{ (Metal oxide)}$

## Mechanism:

- 🔋 Mechanism: Initially the surface of metal undergoes oxidation and the resulting metal oxide forms a barrier which restricts further oxidation. The extent of corrosion depends upon the nature of metal oxide(MO).
- 🔋 i).If the metal oxide is stable, it behaves has a protective layer which prevents further Corrosion. E.g., the oxide films of Al, Sn, Pb, Cu, Cr, W etc. are stable and therefore further corrosion is prohibited.
- 🔋 ii).If the metal oxide unstable, the oxide layer formed decomposes back into metal and oxygen. Oxidation corrosion is not possible.E.g., Ag, Au and Pt do not undergo oxidation corrosion.
- 🔋 iii).If the metal oxide layer is volatile, then the oxide layer volatilizes after formation and leaves the underlying metal surface exposed for further attack. This causes continuous corrosion which is excessive in molybdenum oxide ( $\text{MoO}_3$ ).
- 🔋 iv).If the metal oxide layer is porous, the oxide layer formed has pores or cracks. This cause continuous corrosion till conversion of metal into its oxide is completed. Ex: Alkali and alkaline earth metals (Li, Na, K, Mg etc.)
- 🔋 **2.CORROSION OF THE OTHER GASES:** This type of corrosion is due to gases like  $\text{SO}_2$ ,  $\text{CO}_2$ ,  $\text{Cl}_2$ ,  $\text{H}_2\text{S}$ ,  $\text{F}_2$  etc. In this corrosion, the extent of corrosive effect depends mainly on the chemical affinity between the metal and the gas involved.
- 🔋 **3.LIQUID METAL CORROSION:** This corrosion is due to chemical action of flowing liquid metal at high temperatures on solid metal or alloy. Eg. Coolant (sodium metal) leads to corrosion of cadmium in nuclear reactors.


# WET (OR) ELECTROCHEMICAL CORROSION

- 🔋 This type of Corrosion occurs where a conducting liquid is in contact with the metal.
- 🔋 This corrosion occurs due to the existence of separate anodic and cathodic parts, between which current flows through the conducting solution(Mositure).
- 🔋 At anodic area, oxidation reaction occurs there by destroying the anodic metal either by dissolution or formation of compounds. Hence corrosion always occurs at anodic parts.
- 🔋 **Mechanism:** Under the **above** conditions,one part of metal becomes Anode and other part becomes Cathode.
- 🔋 At anode:In anodic part oxidation of metal occurs.
$$M \rightarrow M^{n+} + ne^{-}$$
- 🔋 At Catode: The cathodic reaction consumes electrons with either evolution of hydrogen (or) absorption of oxygen which depends on the nature of corrosive environment.

## i. Evolution of hydrogen:

- i. Evolution of hydrogen: This type of corrosion occurs in acidic medium.
- Ex: Considering the metal Fe, anodic reaction is dissolution of iron as ferrous ions with liberation of electrons.
- At Anode: Iron undergoes dissolution to give  $\text{Fe}^{2+}$  ions with the liberation of electrons
- $\text{Fe} \rightarrow \text{Fe}^{2+} + 2\text{e}^-$  (Oxidation)
- At Cathode: The liberated electrons flow from anodic to cathodic part, where  $\text{H}^+$  ions get reduced to  $\text{H}_2$ .
- $2\text{H}^+ + 2\text{e}^- \rightarrow \text{H}_2$  (Reduction)
- Overall reaction:  $\text{Fe} + 2\text{H}^+ \rightarrow \text{Fe}^{2+} + \text{H}_2$
- The anodes are large areas, whereas cathodes are small areas.

Mechanism of wet corrosion by hydrogen evolution

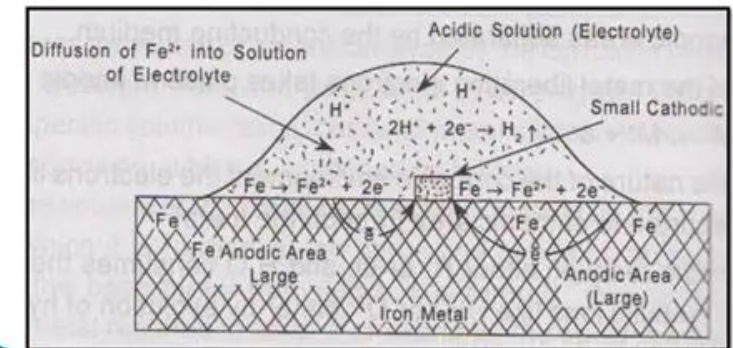



## ii. Absorption of oxygen:

🔋 This type of corrosion occurs in neutral (or) basic medium.

🔋 Ex: Rusting of iron in neutral aqueous solution of electrolytes in presence of atmospheric oxygen.

🔋 At Anode: Iron dissolves as  $\text{Fe}^{2+}$  with liberation of electrons

🔋  $\text{Fe} \rightarrow \text{Fe}^{2+} + 2\text{e}^-$  (Oxidation)

🔋 At cathode: The liberated electrons flow from anodic part to cathodic part of through metal, where the electrons are taken up by the dissolved oxygen to form  $\text{OH}^-$  ions


🔋  $\frac{1}{2} \text{O}_2 + \text{H}_2\text{O} + 2\text{e}^- \rightarrow 2\text{OH}^-$  (Reduction)

🔋 Overall reaction:  $\text{Fe} + \frac{1}{2} \text{O}_2 + \text{H}_2\text{O} \rightarrow \text{Fe}(\text{OH})_2$

🔋 If oxygen is in excess, ferrous hydroxide ( $\text{Fe}(\text{OH})_2$ ) is easily oxidized to ferric hydroxide ( $\text{Fe}(\text{OH})_3$ ).

🔋  $4\text{Fe}^{2+}(\text{OH})_2 + \text{O}_2 + 2\text{H}_2\text{O} \rightarrow 4\text{Fe}(\text{OH})_3$

### Mechanism of wet corrosion by hydrogen evolution

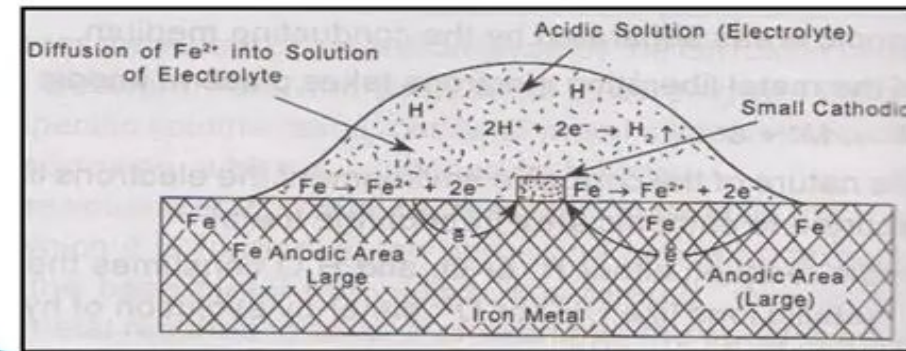

# Types of corrosion:

 (i). Galvanic Corrosion


 (ii). Waterline Corrosion

 (iii). Pitting corrosion

 **.Galvanic Corrosion:** This also called bimetallic corrosion or dissimilar metal corrosion.

 When two dissimilar metals are electrically connected and exposed to an electrolyte, the metal higher in electrochemical series(Anode) undergoes corrosion.

 This type of corrosion is called galvanic corrosion.

 In the above Zn and Cu metals are contact with each other,Here Zn metal is Higher position in electrochemical series and act as anode ,so undergoes corrosion.

 Cu metal is lower position in electrochemical series and act as cathode ,so protected from corrosion.

## (ii). Waterline Corrosion:

- 🔋 This is also known as differential oxygen concentration corrosion.
- 🔋 It has been observed in the case of iron tank containing water, that the portion of iron tank just below the water level undergoes corrosion.
- 🔋 It is due to the difference in oxygen concentration.
- 🔋 At anode:  $\text{Fe} \rightarrow \text{Fe}^{2+} + 2\text{e}^-$
- 🔋 At cathode:  $2\text{H}^+ + \frac{1}{2}\text{O}_2 + 2\text{e}^- \rightarrow \text{H}_2\text{O}$
- 🔋 Overall reaction:  $\text{Fe} + \frac{1}{2}\text{O}_2 + \text{H}_2\text{O} \rightarrow \text{Fe}^{2+} + 2\text{OH}^- \text{ (Fe (OH)}_2\text{)}$

### (iii)Pitting corrosion:

- 🔋 Pitting corrosion is due to crack on the surface of a metal, there is a formation of a “local galvanic cell” (Pinholes, pits and cavities) in the metal.
- 🔋 Pitting is usually the result of the breakdown or cracking of the protective film on a metal at specific points. This gives rise to the formation of small anodic and large cathodic areas. In the corrosive environment this produces corrosion current.

# Factors affecting rate of corrosion

🔋 The rate and extent of corrosion depends on the nature of the metal and nature of corroding environment.

🔋 Those are 1. Nature of the Metal 2. Nature of the environment.

## 🔋 1. Nature of the Metal

Different properties of a metal are responsible for corrosion. These properties are given below.

🔋 a. Position of metal in galvanic(emf) series

🔋 b. Over voltage

🔋 c. Nature of surface/oxide film

🔋 d. Volatility of corrosion product

🔋 e. Purity of Metal

### a. Position of metal in galvanic series:

- 🔋 A metal having higher position in galvanic series (EMF series) undergoes corrosion when connected to another metal below it.
- 🔋 The Metal which is Higher position in galvanic (EMF) Series is faster in corrosion. The Metal which is Lower position in galvanic (EMF) Series is slow in corrosion. Ex: Li Corrodes faster than Mg.
- 🔋 Because Mg metal is lower position than Li metal in the emf series.
- 🔋 b. **Over voltage / Potential** : Over voltage of a metal in the corrosive environment is inversely proportional to corrosion rate.
- 🔋 Ex: In case of Zinc metal placed in a normal solution of  $\text{H}_2\text{SO}_4$ , over voltage of Zn is 0.7 volts. Here the rate of corrosion is very low due to high overvoltage of zinc metal (0.7 V). By adding small amount of  $\text{CuSO}_4$  to  $\text{H}_2\text{SO}_4$ .
- 🔋 Over voltage of Zn is reduced to 0.33 V and rate of corrosion is increased.
- 🔋 c. **Nature of surface/oxide film**: Nature of surface/oxide film: The ratio of the volumes of metal oxides to the metal is known as specific volume ratio (Pilling Bedworth Rule). Greater the specific volume ratio, lesser the corrosion rate.

🔊 Specific Volume Ratio = Volume of metal oxide/ Volume of metal

🔊 Smaller the ratio greater the corrosion rate

🔊 d. Nature of the corrosion products:

🔊 If the corrosion product is soluble in the corroding medium, the corrosion rate will be faster.

🔊 If the corrosion product is insoluble in the corroding medium, the corrosion rate will be slow.

🔊 If the corrosion product is volatile, rapid and continuous corrosion occurs.

🔊 e. Purity of the Metal:

🔊 100% pure metal does not undergo any type of corrosion

🔊 The rate of corrosion increases with the increasing exposure and extent of the impurities

## 2. Nature of environment:

Different properties of an environment are responsible for corrosion.

These properties are given below.

- a. Effect of pH b. Temperature c. Humidity
- d. Amount of oxygen in atmosphere e. Presence of corrosive gases . f. Presence of suspended particles

### a. Effect of pH:

- Rate of corrosion is inversely proportional to temperature.
- Rate of corrosion can be reduced by increasing the pH of the solution by adding alkali.
- Acidic pH increases the rate of corrosion (pH is less than 7).
- Basic pH decreases the rate of corrosion (pH is more than 7).
- Thus rate of corrosion will be maximum when the corrosive environment is acidic.

### b. Temperature:

- Rate of corrosion is directly proportional to temperature, because the rate of reaction and diffusion of ions increased with increase the temperature.
- Hence With the increase of temperature the corrosion rate is increases.



### c. Humidity :

 Rate of corrosion is directly proportional to Humidity.

 Rate of corrosion will be more ,when the humidity is high in environmente.

### d. Amount of oxygen in atmosphere:

 As the percentage of oxygen in atmosphere increases, the rate of corrosion also increases due

 to the formation of oxygen concentration cell.

The decay of metal occurs at the anodic part and the cathodic part of the metal is protected.

### e. Presence of corrosive gases:

 acidic gasses like  $\text{CO}_2$ ,  $\text{SO}_2$  produces electrolytes which are acidic and increases corrosion.

### f. Presence of suspended particles:

 particles like  $\text{NaCl}$ ,  $(\text{NH}_4)_2\text{SO}_4$  produces electrolytes which increases corrosion.

# CORROSION CONTROL METHODS:

 **CATHODIC PROTECTION** : The method of protecting the base metal by making it to behave like a cathode is called as cathodic protection.

 There are two types of cathodic protection

(a) Sacrificial anode method (b) Impressed current method.

## (a) SACRIFICIAL ANODE METHOD:

In this protection method, the metallic structure to be protected (base metal) is connected by a wire to a more anodic metal so that all the corrosion is concentrated at this more anodic metal.

The more anodic metal itself gets corroded , while the parent structure (base metal) is protected.

The more active metal is called sacrificial anode.

Commonly sacrificial anodes are Mg, Zn, Al and their alloys

Eg. A ship-hull which is made up of steel is connected to sacrificial anode (Zn-blocks) which undergoes corrosion leaving the base metal protected.

Eg. The underground water pipelines and water tanks are also protected by sacrificial anode

## The important applications of this method are:

- 1. Protection of underground cables and pipelines from soil corrosion.
- 2. Protection of ships and boat hulls from marine corrosion.
- 3. Prevention of rusty water by inserting Mg sheets or rods into domestic water boilers or tanks.

Eg: Sacrificial anode method: ship hull and underground water pipeline

### (b) IMPRESSED CURRENT METHOD:

- In this method, an impressed current is applied in opposite direction to nullify the corrosion current, and convert the corroding metal from anode to cathode.
- The impressed current is slightly higher than the corrosion current. Thus the anodic corroding metal becomes cathodic and protected from corrosion.
- The impressed current is taken from a battery or rectified on A.C. line.
- The impressed current protection method is used for water tanks, water & oil pipe lines, transmission line towers etc.

## ADVANTAGES:

1. Operating and maintenance costs are less.
2. Suited for large structures and long term operations.

### APPLICATIONS:

1. Tanks and pipelines,
2. Transmission line-towers,
3. Marine piers, Ships etc.